

PL-CNC LAMP



Ø M-60

Model	Tube	Choke	Power Comp.	Length Exter.	Length IBC	Lux Level
PL CNC 9	PL 9W	9/11W	11W	325MM	360MM	110
PL CNC 11	PL 11W	9/11W	13W	360MM	485MM	180
PL CNC 18	PL 9W X2	9W X 2	20W	485MM	585MM	200
PL CNC 22	PL 11W X2	11W X2	24W	485MM	585MM	

GLASS TUBE - BOROSILICATE GLASS TUBE Ø M-60 X 3.2 mm THICKNESS

PL CNC 18A	PL 18W	18W	18W	360MM	360MM	280
PL CNC 26	PL 26W	26W	26W	360MM	485MM	260
PL CNC 36	PL 36W	36W	40W	550MM	760MM	575
PL CNC 55	PL 55W	55W	56W	760MM	--	850

GLASS TUBE - BOROSILICATE GLASS TUBE Ø M-70 X 3.2 mm THICKNESS

PL-CNC LAMP



Ø M-70

CHOKE	: Philips - Electromagnetic Ballast -230V.AC
TUBE LIGHT	: Osram - (White/Yellow) with expected life of 8000Hrs
VOLTAGE	: 230V.AC
PROTECTION	: IP 67
CABLE	: 3 CORE X 2 MTR.
ENCLOSURE	: NYLON 6 MOULDED SIDE BRACKET WITH ROTATING GLASS

Model	Power Comp.	Length Exter.	Length IBC	Lux Level
CNC 6 LED	7.5W	-	360MM	370
CNC 8 LED	9.6W	-	485MM	430
CNC 12 LED	14.4W	585MM (230V)	585MM (24V)	630
GLASS TUBE - BOROSILICATE GLASS TUBE Ø M-60 X 3.2 mm THICKNESS				
CNC 4 LED X 2	9.6W	360MM (230V)	360MM (24V)	750
CNC 6 LED X 2	14.4W	485MM (230V)	485MM (24V)	750
CNC 8 LED X 2	20.8W	550MM (230V)	550MM (24V)	890
CNC 12 LED X 2	31.2W	760MM (230V)	760MM (24V)	1325
GLASS TUBE - BOROSILICATE GLASS TUBE Ø M-70 X 3.2 mm THICKNESS				

CABLE	: 3 CORE X 2 MTR.
LED	: Osram - GERMANY - 105 lumen/ 1W With expected life 40000 hr.
VOLTAGE	: 24V.DC/AC , 110V.AC , 230V.AC
LED DRIVER	: b.a.g. CE - 110 V.AC, 230 V.AC SPARKTRON - 24V AC/DC
PROTECTION	: IP 67
ENCLOSURE	: NYLON 6 MOULDED SIDE BRACKET WITH ROTATING GLASS
COLOR	: LED - COOL WHITE / WARM WHITE

LED-CNC LAMP




Ø M-60

LED-CNC LAMP



Ø M-70

LED-TIER LAMP 60MM

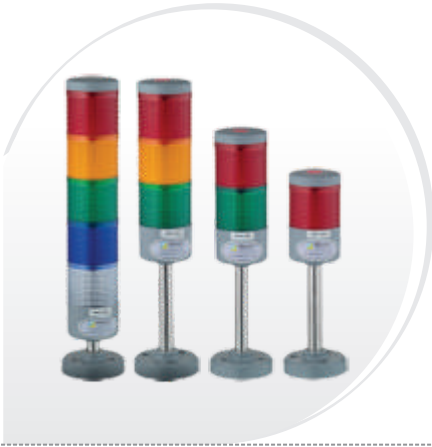


LED BASED STAGE INDICATION LAMPS

Types	: Modular 1 to 5 stage tiers
Operating Voltage	: 24V.DC /230V.AC
LEDS	: High Intensity color LEDS / SMD LED'S
Colours	: Red/Amber / Green/ Blue / White
Optional	: Flasher /Buzzer (24V.DC)
Lamp Diameter	: 60mm
Stand	: 5" Long S.S. pipe with plastic moulded base for easy mounting S S PIPE-Different lengths are available.

LED BASED STAGE INDICATION LAMPS

Types	: Modular 1 to 5 stage tiers
Operating Voltage	: 24V.DC
LEDs	: High Intensity color LEDS / SMD LED'S
Colour	: Red/Amber / Green/ Blue / White
Optional	: Flasher /Buzzer (24V.DC)
Lamp Diameter	: 45mm
Stand	: 1" Long S.S. pipe with plastic moulded base for easy mounting S S PIPE-Different lengths are available.

LED-TIER LAMP 45MM

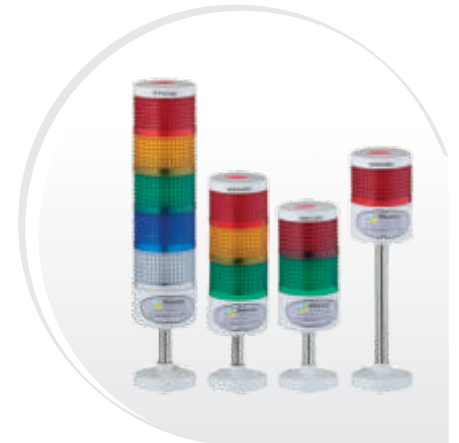

PANEL LIGHT 11W



Lamp Enclosure	: White plastic moulded enclosure
Tube Light	: Osram - PL -11W
Ballast	: Philips Electronics Ballast
Voltage	: 230V.AC
SIZE	: 315mm x 60mm x 1.2mm thick white powder coated mounting plate
Switch	: On / Off
Cover	: 2 mm Acrylic Cover
Colour	: White and Warm White

LED Panel Lamp	: 6 LED
Lamp Enclosure	: White plastic moulded enclosure
LED	: Osram-GERMANY - 105 lumen/ 1W With expected life 40000 hr.
LED Driver	: b.a.g. - 230V.AC SPARKTRON - 24V.DC/AC
Lens	: Glarefree Lens /2mm defuse Acrylic Cover
Size	: 250mm x 60mm x 1.2mm thick white powder coated mounting plate
Switch	: On / Off
Cover	: 2 mm Acrylic Cover
Colour	: White and Warm White

6 LED PANEL LIGHT

